

Faced Roof Insulation

Molded Polystyrene Insulation.

Foam-Control® faced roof insulation come with a factory applied fiberglass fire resistant facer that replaces the need for coverboards of gypsum, woodfiber and perlite over molded polystyrene in selected Single-Ply Membrane roofing systems. Foam-Control faced roof insulation can be applied directly to metal decks providing a one-step insulation and fire resistant facer system without the use of a code specified thermal barrier, resulting in reduced material and labor costs.

- Cost effective roof insulation
- R-value that never changes and is stable over time
- Range of compressive strength available
- Closed cell insulation with superior moisture resistance
- Meets code requirements for direct-to-deck application

Proven to meet, or exceed, building codes.

Foam-Control is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER11812-01. Foam-Control meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".




Direct-To-Deck Assemblies.

UL recognizes Foam-Control insulation to be applied directly over steel roof decks along with a Class A, B or C roof covering.

Steel Deck: Minimum 22 gauge, 1/2" deep, non-perforated, and maximum 6" flutes.

Molded Polystyrene Thickness: Up to 10" (Type I). Refer to UL Roof Deck Construction No. 458 for other thickness and Types.

Accepted Membranes: Approved EPDM or thermoplastic single-ply that are ballasted or mechanically attached, maximum 80 mils thickness.

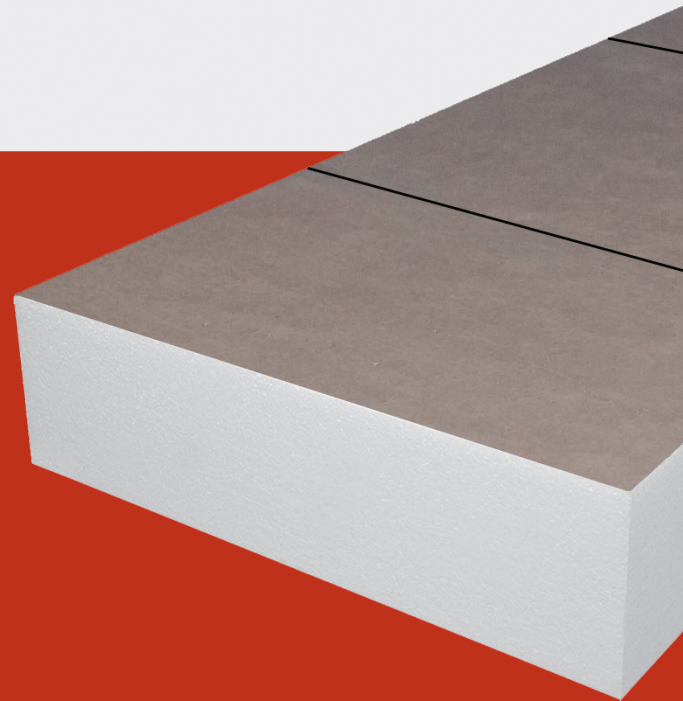

FOAM FACTS:

Foam-Control outperforms XPS.

- Foam-Control provides a stable long-term R-value at a lower cost
- Foam-Control uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- Foam-Control meets strength requirements at a lower cost
- Foam-Control and XPS have resistance to moisture, but Foam-Control has a higher vapor permeance leading to superior drying potential

Performance Value.

When you consider all performance characteristics and cost, Foam-Control is your best choice for foam insulation.

Foam-Control has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

Foam-Control has compressive strength to meet specific project requirements.

Foam-Control is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means Foam-Control maintains R-value.

Termite Resistant - Perform Guard®.

One of the most destructive forces anywhere is termites. Foam-Control can be manufactured with Perform Guard, a proven and safe additive, that effectively resists termites.

Foam-Control with Perform Guard meets ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

Recyclable.

After its life as a building insulation, Foam-Control is 100% recyclable. It can be ground into granules and reincorporated into new Foam-Control products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have Foam-Control contribute to your next project, just contact your nearest Foam-Control manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Foam-Control products, pricing, and answers to all of your questions.



BIG SKY INSULATIONS, INC
15 Arden Drive | P.O. Box 838
Belgrade, MT 59714

Email: answers@bigskycontrol.com
Website: www.bigskyfoamcontrol.com



Foam-Control products are manufactured by AFM Corporation licensees.

Copyright © 2020 AFM Corporation. All rights reserved. Printed in USA. Foam-Control and the Foam-Control logo are registered trademarks of AFM Corporation, Lakeville, MN.

UL logo is a registered trademark of UL LLC. USGBC logo is a registered trademark of U.S. Green Building Council.

R04-01/20



www.foam-control.com

**MOLDED
POLYSTYRENE
INSULATION**